# INSTRUCTION SHEET FOR MODELS GL3000801,GL3000401 LED FLASHERS



## WARNING

This product contains high intensity LED devices. To prevent eye permanent eye damage, DO NOT stare into the light beam at close range.

#### SAFETY MESSAGE TO INSTALLERS AND USERS

People's lives depend on your safe installation of our products. It is important to read, understand and follow all instructions shipped with the products. In addition, listed below are some other important safety instructions and precautions you should follow:

- To properly install this light, you must have a good understanding of automotive systems, along with proficiency in the installation and use of safety warning equipment.
- DO NOT install equipment or route wiring in the deployment path of an air bag.
- When drilling into a vehicle structure, be sure that both sides of the surface are clear of anything that could be damaged.
- Locate light control so the VEHICLE and CONTROL can be operated safely under all driving conditions.
- Do not attempt to activate or deactivate light control while driving in a hazardous situation.
- You should frequently inspect the light to ensure that it is operating properly and that it is securely attached to the vehicle.
- This product contains high intensity LED devices. To prevent eye permanent eye damage, DO NOT stare into the light beam at close range.
- File these instructions in a save place and refer to them when maintaining and/or reinstalling the product.

Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death to you or others.


# A

## WARNING

This product is intended for supplemental warning and for use in conjunction with an approved primary warning light system. Consult local codes and regulations to determine if this product complies with the horizontal or vertical mount positioning desired in your application.

When installing equipment inside air bag equipped vehicles, the installer MUST ensure that the equipment is installed ONLY in areas recommended by the vehicle manufacturer. Failure to observe this warning will reduce the effectiveness of the air bag, damage the air bag, or potentially damage or dislodge the equipment, causing serious injury or death to you or others.

### **WIRING DIAGRAM**

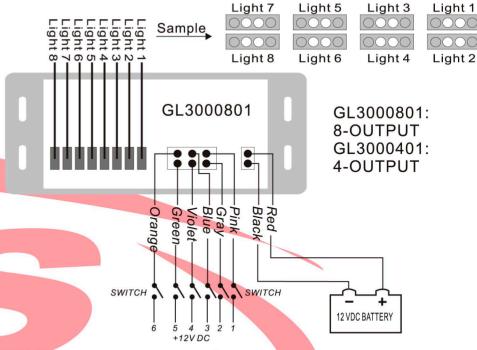

**Switch 1:** This function is for crossed-flashing pattern selection, including 44 different flash mode, by pressing this button, you can activate this feature;

**Switch 2:**Parking lights:This function is for all lights on, This mode will save 50% power, but also reduce the brightness of 50%.

**Switch 3:** This function is for vertical flashing pattern selection, including 44 different flash mode, by pressing this button, you can activate this feature;

**Switch 4:** This function is for emergency flashing simultaneously, including 15 different flash modes, by pressing this button, you can activate this feature;

**Switch 5:** This function is for parallel flashing pattern selection, including 44 different flash modes, by pressing this button, you can activate this feature;

**Switch 6:** During each function activated, this button can adjust the flash mode by pressing once to change to one another flashing mode until stop pressing, the mode will be remembered.



## VS Signal, INC.

1 So., Kalamath St., Denver, CO 80223, U.S.A Sales E-mail: sales@vssignal.com

Tel.: 1-303-534-9299 www.vssignal.com